



Project \_\_\_\_\_  
 AIA # \_\_\_\_\_ SIS # \_\_\_\_\_  
 Item # \_\_\_\_\_ Quantity \_\_\_\_\_ C.S.I. Section 114000

## VBP SERIES

### Holding & Transport Cabinets



Model VBP18ES  
with optional bumper

SELL SHEET



### SPECIFIER STATEMENT

Vulcan Model No. VBP heated holding and transport cabinets. Blower motor for gentle and even temperature distribution. Complete with 5" heavy duty casters (2 swivel with brakes and 2 rigid) (VBP5ES has 3" casters). Electronic control with digital display for holding at temperatures up to 200°F. Adjustable racking will hold 18" x 26" or 12" x 20" pans or a combination of both on 1½" centers. Lip-load racking will hold 18" x 26" pans on 1½" centers. Shelving will hold a variety of pan sizes. Complete with universal tray slides adjustable on 1½" centers. Cabinet interior and exterior are both constructed out of 20 gauge stainless steel. Recessed side-mounted handles, magnetic action door latch, and full insulation; 1½" in side walls and 2" in top. Integrated steel frame for maximum strength. Field reversible doors. Complete with rear mounted cord and plug: NEMA 5-15 for 120 volts and NEMA 6-15 for 208-240 volts. One year limited parts and labor warranty. After the first year, 10-year parts warranty on the heating elements.

UL Listed. UL Listed to Canadian safety standards. Classified by UL to NSF Standard #4.

### MODELS

Units with adjustable racking:

- VBP5ES** (see reverse for capacities)
- VBP7ES** (see reverse for capacities)
- VBP13ES** (see reverse for capacities)
- VBP15ES** (see reverse for capacities)
- VBP18ES** (see reverse for capacities)

Units with lip-load racking:

- VBP7LL** (Fifteen 18" x 26" x 1" sheet pans)
- VBP15LL** (Thirty 18" x 26" x 1" sheet pans)

Units with shelves:

- VBP7SL** (Three Shelves)
- VBP15SL** (Six Shelves)

### STANDARD FEATURES

- Holding Capacity:
  - 18" x 26" sheet pans
  - 12" x 20" pans, or a combination of both on 1½" centers
  - Other pan sizes on shelves
- Electronic control with digital display for holding at temperatures up to 200°F
- Blower motor for gentle and even temperature distribution
- Dutch doors (size 15 and 18 models)
- 5" heavy duty casters (2 swivel with brakes and 2 rigid) (3" on size 5 models)
- Recessed side mounted handles
- Universal tray slides adjustable on 1½" centers; VBP15ES & VBP13ES ship with 10 pairs of tray slides; VBP7ES & VBP5ES ships with 5 pairs, VBP18ES ships with 15 pairs
- Interior and the exterior are both constructed out of 20 gauge stainless steel
- Fully insulated with 1½" in side walls and 2" in top
- Integrated steel frame for maximum strength
- Magnetic action door latch
- Field reversible doors
- Rear mounted cord
- Complete with cord and plug: NEMA 5-15 for 120 volts and NEMA 6-15 for 208-240 volts
- One-year limited parts and labor warranty; after the first year, 10-year parts warranty on the heating elements


### OPTIONS

- 208/240 volt
- Humidity pan
- Full perimeter bumper
- Glass Dutch doors (sizes 7 and 15 only. Non Energy Star®)
- Wire shelves to sit on tray slides
- Additional tray slides
- Mechanical control


VBP SERIES – Holding & Transport Cabinets

Approved by \_\_\_\_\_ Date \_\_\_\_\_ Approved by \_\_\_\_\_ Date \_\_\_\_\_


Drawings shown with optional bumper

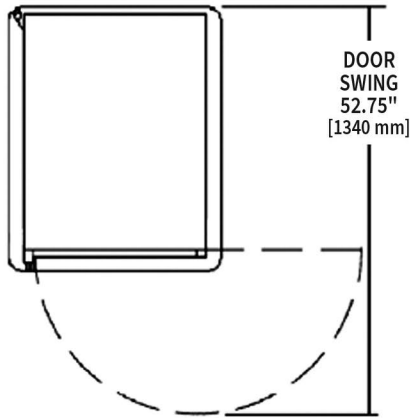


All Models Top View

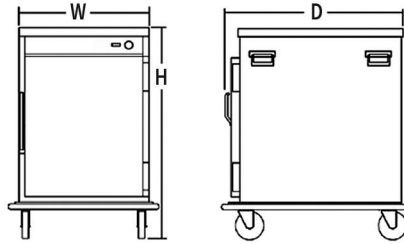


VBP5 Front & Side Views

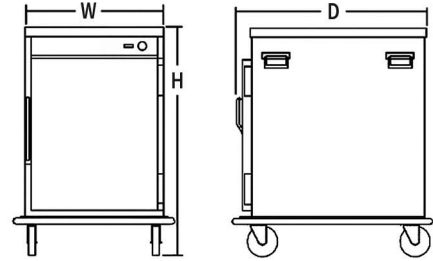

VBP7 Front & Side Views

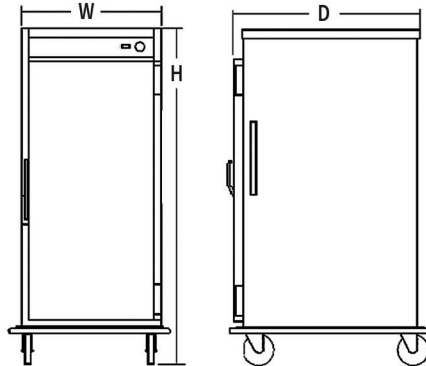

VBP13 Front & Side Views

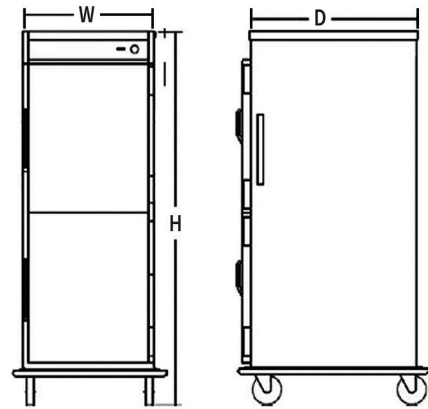

VBP15 & VBP18 Front & Side Views

INSTALLATION MANUAL

CAD and/or Revit Files Available

This appliance is manufactured for commercial use only and is not intended for home use.

| Model   | Dimensions               | Capacity             |                      | Electrical |       |      | Shipping Weights |     |
|---------|--------------------------|----------------------|----------------------|------------|-------|------|------------------|-----|
|         | Exterior                 | 12" x 20" x 2½" Pans | 18" x 26" Sheet Pans | Volts      | Watts | Amps | Lbs.             | KG  |
| VBP5ES  | 27¼" W x 33¾" D x 30½" H | 10                   | 5                    | 120        | 1,500 | 12.5 | 173              | 79  |
| VBP7ES  | 27¼" W x 33¾" D x 40¼" H | 14                   | 7                    | 120        | 1,500 | 12.5 | 198              | 90  |
| VBP7LL  | 27¼" W x 33¾" D x 40¼" H | N/A                  | 15                   | 120        | 1,500 | 12.5 | 198              | 90  |
| VBP7SL  | 27¼" W x 33¾" D x 40¼" H | 14                   | 7                    | 120        | 1,500 | 12.5 | 198              | 90  |
| VBP13ES | 27¼" W x 33¾" D x 59¾" H | 26                   | 13                   | 120        | 1,500 | 12.5 | 270              | 123 |
| VBP15ES | 27¼" W x 33¾" D x 65½" H | 30                   | 15                   | 120        | 1,500 | 12.5 | 297              | 135 |
| VBP15LL | 27¼" W x 33¾" D x 65½" H | N/A                  | 30                   | 120        | 1,500 | 12.5 | 297              | 135 |
| VBP15SL | 27¼" W x 33¾" D x 65¼" H | 30                   | 15                   | 120        | 1,500 | 12.5 | 297              | 135 |
| VBP18ES | 27¼" W x 33¾" D x 69½" H | 36                   | 18                   | 120        | 1,500 | 12.5 | 337              | 153 |

Optional bumper adds ¾" to the width and 1½" to the depth.

Base (ES) models include fully adjustable tray slides. SL models include adjustable shelves. VBP7SL includes 3 shelves; VBP15SL includes 6 shelves. LL models include fixed lipload racking. Optional glass doors nullify ENERGY STAR® certification.

As continued product improvement is a policy of Vulcan, specifications are subject to change without notice.